

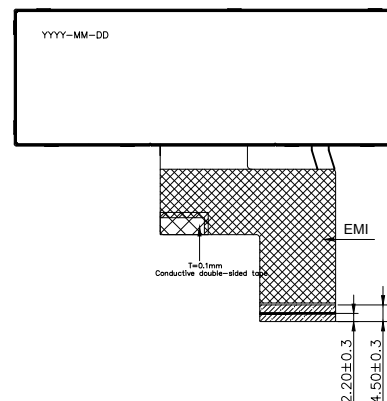
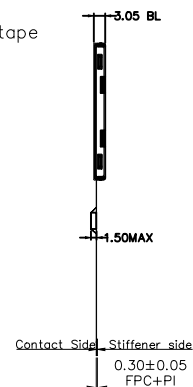
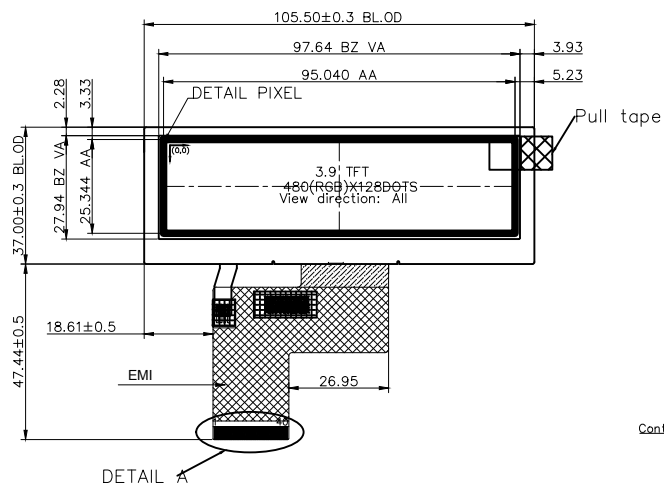


DETAIL PIXEL
SCALE 50:1

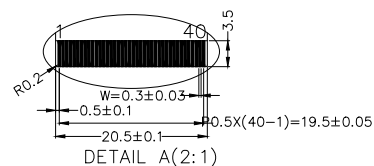

PIN	FUNCTION
1	VLED-K
2	VLED-A
3	GND
4	VDD
5	R0
6	R1
7	R2
8	R3
9	R4
10	R5
11	R6
12	R7
13	G0
14	G1
15	G2
16	G3
17	G4
18	G5
19	G6
20	G7
21	B0
22	B1
23	B2
24	B3
25	B4
26	B5
27	B6
28	B7
29	GND
30	DC/CK
31	DISP
32	HSYNC
33	VSING
34	DE
35	NC
36	GND
37	NC(XR)
38	NC(YR)
39	NC(XL)
40	NC(YL)



NOTES:

1. DISPLAY TYPE: 3.9"TFT, TRANSMISSIVE, NORMAL BLACK
2. Display Color: 16.7M
3. VIEWING DIRECTION : ALL
4. Driver IC : ST7282A
5. Operating Temperature:-20 to +70
6. Storage Temperature:-30 to +80
7. GENERAL TOLERANCE: ±0.2
8. LCM Luminance:LED/1000cd/m2 (TYP)
9. ROHS Compliant

Victronix Tecenstar INT'L Co., LTD

Approved By		SIZE:	3.9inch TFT
Checked By		DWARING_NO.:	VXT039BPSA-02
Drawn By	Solon2024.10.21	CUSTOMER_NO.:	
UNIT:mm			